



# LG Cosmos 2 Motherboard Replacement

Replacing the motherboard will take some care and time.

Written By: Nick White



## INTRODUCTION

The steps to this process straightforward and mostly involve removing screws.

---



### TOOLS:

- [iFixit Opening Tools](#) (1)
  - [Tweezers](#) (1)
  - [64 Bit Driver Kit](#) (1)
-

## Step 1 — Battery



- Insert the plastic opener into the slot at the top of the device.
- Apply gentle pressure with the plastic tool to pop the back case off.

## Step 2



- Use the plastic opener to lift, and remove, the device battery.




## Step 3 — Rear Case




- Use a screwdriver and corresponding bit to remove the six 2mm screws that are located along the edge of the rear case. Set the screws aside.

## Step 4

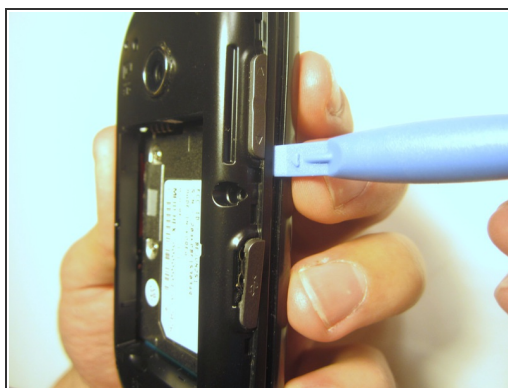


- Use the plastic opener to pry the rear case loose.
- ⓘ This can be difficult. You will need to pry around the entire edge of the rear case, not just in one place.

## Step 5 — Motherboard

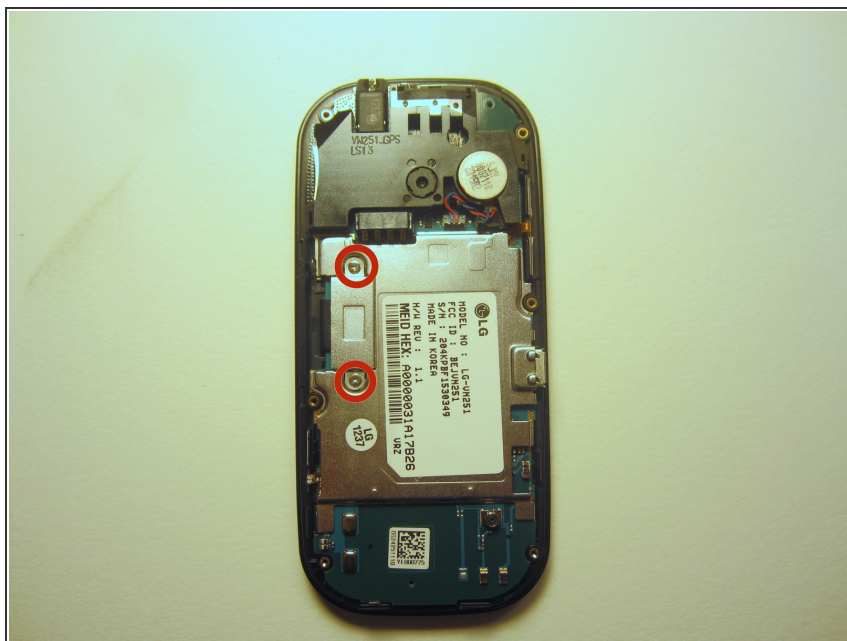

- Use a screwdriver and corresponding bit to remove the two 3mm screws that attach the motherboard to the front case. Set the screws aside



## Step 6

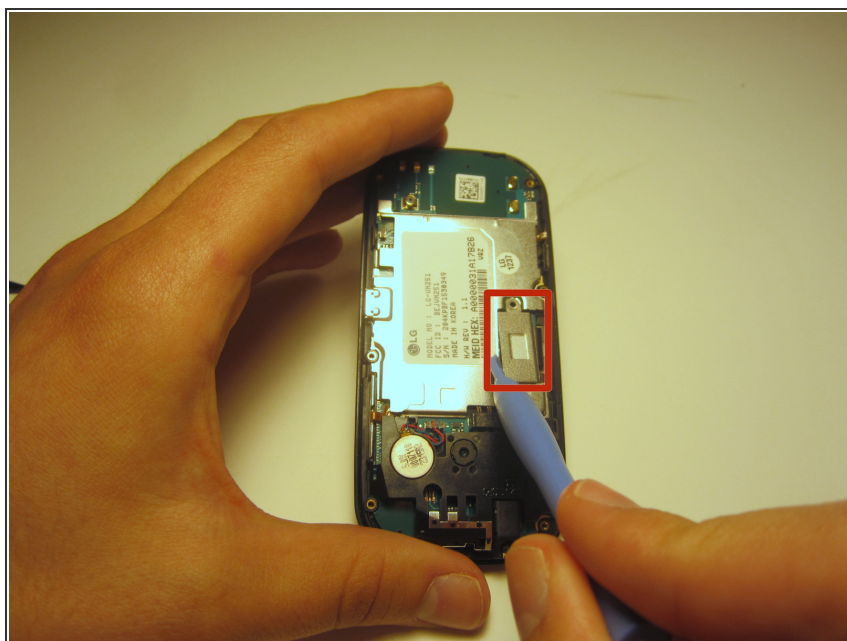

- Rotate the phone 180 degrees and use the plastic opener to lift the metal piece that covers the ribbon cable.



## Step 7

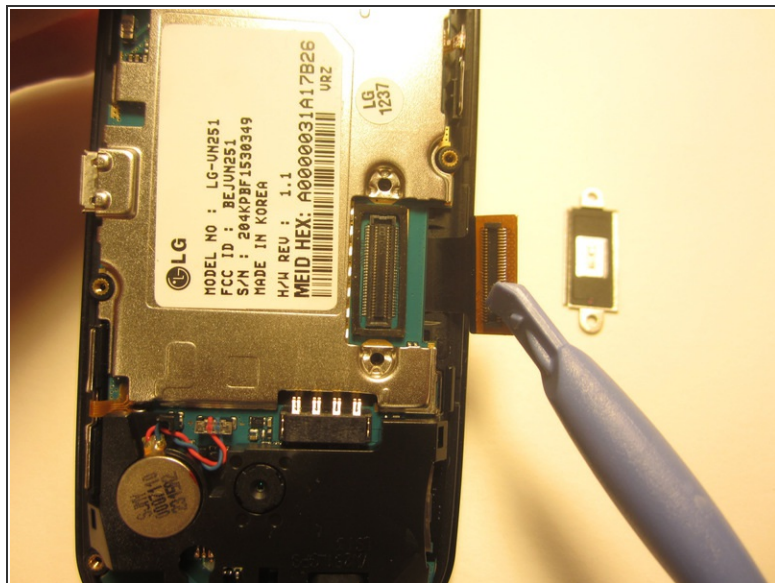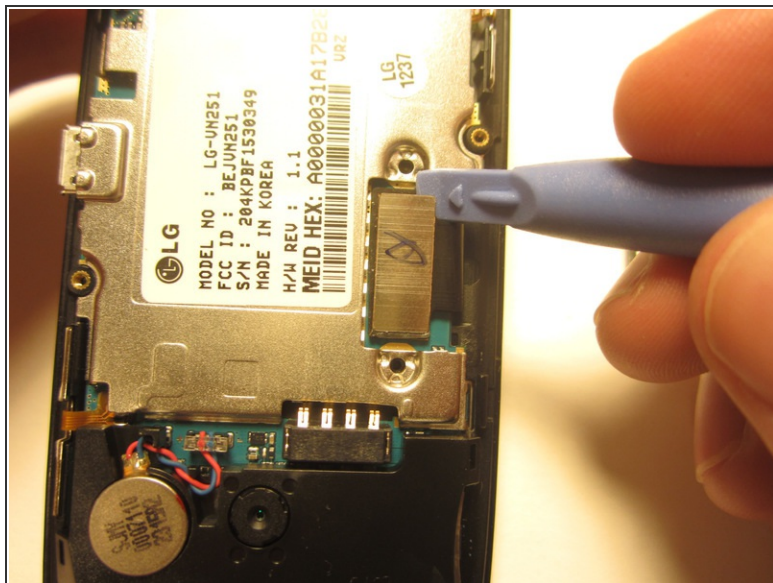

- Use the plastic opener to disconnect the ribbon cable.


## Step 8



- Use tweezers to disconnect the two cables that attach the motherboard to the case.

⚠ Note: Pull on the cables gently to prevent damage for future use.

## Step 9

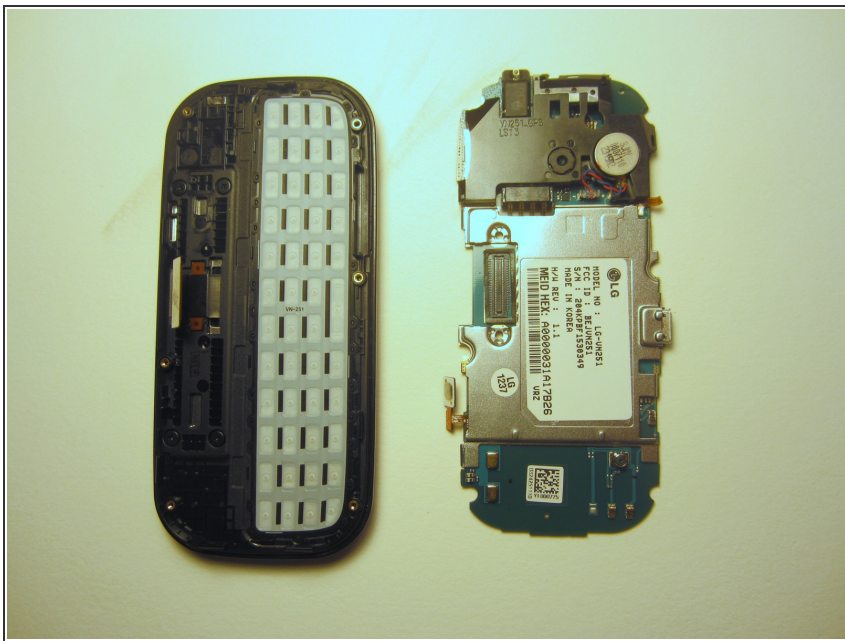

- Remove the motherboard from the front case.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-12-02 09:32:42 AM.